


1200 S. Hillcrest Ct, Bldg 6, Apt. 109,  
Hollywood, FL 33021, USA

info@navatech-usa.com  
www.navatech-usa.com

Tel: 305-600-4458  
Fax: 305-675-2658

### NAVABLOCK® DR-1 ISO 17712 High Security Seal Data Sheet

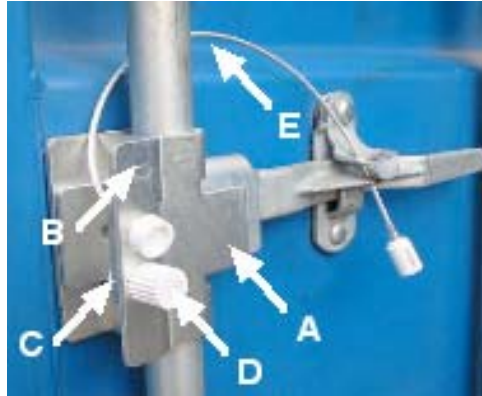

#### Features:

- **NAVABLOCK DR-1** provides a high degree of anti-theft and anti-terror security available today, combined with a tamper evident sealing feature.
- A new design based on an innovative handle blocking principle.
- Easy to fit, no special skills or tools required; simple, all steel robust design fits most standard containers and trucks.
- Resists cutting by double lever shears, breaking by hammer, crowbar or other crude tools.
- Based on a unique concept of immobilizing the rotation of the locking rod and thereby locking and securing the doors.
- Breaking load is over 2.5 tons, as witnessed by an independent testing authority.
- Perpetrators cannot break-in easily, since its heavy steel plate components are difficult to cut by common burglars tools.
- Incorporates refinements based on experience gained from the use of over 1,000,000 sets of various types of **NAVABLOCK®**, i.e. the MKII, MKII-A, MKIII, MKIII-A MKV and MKV-R.
- When shipping goods in containers or trucks in the aftermath of the September 11, 2001 terror attack on the US, one cannot afford not to have the doors secured with a truly verifiably secure seal such as the solid steel **NAVABLOCK DR-1** locking and sealing device.

#### Description:

One set of **NAVABLOCK DR-1** consists of the following parts:

- 1 x 5 mm (~ 3/16") thick locking bracket (steel) for mounting over the handle of the inner door rod locking rod
- 1 x 5 mm (~ 3/16") thick holding bracket (steel) for connecting with the locking bracket
- 1 x 14 mm (~ 9/16") locking pin (tempered steel) to secure the brackets "A" and "B" (not visible in the picture)
- 1 x locking bush (steel + ABS plastic sleeve) to secure the locking pin "C"
- 1 x 3 mm (1/8") cable seal to secure the right hand door's handle

**The seal number and logo are laser engraved on the ABS plastic sleeves of the locking bushes**

#### Technical Specification:

- **NAVABLOCK DR-1** locking and sealing device is designed to fit on one of the right hand door's locking bars and prevents the rotation of the door rod into "open" position, thereby sealing and securing the container.
- Main components of the **NAVABLOCK DR-1** are of 5 mm (~ 3/16") thick steel plate, which is nearly double to triple that of container or truck panels or roof structure and exceed the dimensions of most of the door's locking fittings.
- The **NAVABLOCK DR-1** is packed 10 sets/carton box. The total weight per set of standard length is ~ 1.1 kg (~ 2.5 lb) and per carton weight is ~ 12.0 kg (~ 26 lb).
- **The cable seal of the NAVABLOCK DR-1 and is available with a Memory Button (2 Kb, Mil. Spec.) for uploading and downloading of encrypted data, such as the B/L, Packing List, Container Seal Number, port of loading, etc.- up to ten A-4 pages of data, which can be relayed via a contact reader and wireless transmitter to any destination. Reliable and useful to comply with latest US Customs 24 hour manifest rule.**

The **NAVABLOCK® DR-1** is a "High Security" seal as specified by ISO/PAS 17712 and is C-TPAT compliant.  
**NAVATECH reserves the right to modify the design and/or materials, at any time, without prior notice, as deemed necessary.**